

# K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

**HANSA FLEX**

## 属性

**属性** Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%)  
 Connection of compressed air and vacuum with push-in coupling  
 Basic housing with connection facility for a vacuum switch  
 Maximum suction capacity with minimum compressed air consumption  
 Minimum size, low weight  
 Various power ratings for optimised air consumption


**应用** For universal use in handling systems with very high dynamic movements  
 Handling all kinds of air-tight components  
 For use in separation systems where space is restricted.  
 \nConstruction of ejector blocks for centralised or decentralised individual control of suction pads.

**喷嘴系统** Brass

**接口** Push-in coupling

**消音器** Plastic

**基体** Impact-resistant plastic

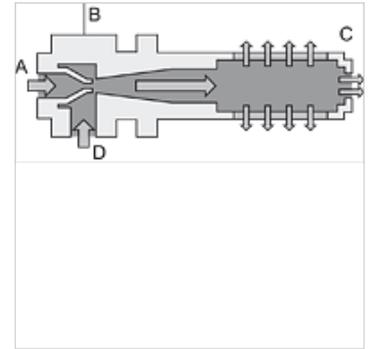

## 提示

其它数据应客户要求提供。

## 描述

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## 货品

名称	喷嘴尺寸	抽吸阀静止位置	压缩空气接口	真空接头	尺寸
K- 07 45 01 20	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 22	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 24	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 26	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

## 附件

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit