

K-KOMPAKTEJEKTOREN MINI

Mini-compact ejectors

HANSA FLEX

属性

属性

- Vacuum generator with integrated control valves and system monitoring functions
- Gripping and blowing off can be controlled without the need for external valves
- Optimised air consumption thanks to many models with differing suction capacities
- Minimum energy costs in continuous operation
- Easy adjustment with foil keypad, LED display of the settings
- Minimum size and low weight
- Optimum vacuum generation directly on the suction pad
- Complete solution for very simple installation
- Short learning curve thanks to "teach" function
- No need for additional sensors
- Easily visible status indication


应用

Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems

抽真空度 85 %

基体 Anodised aluminium

集成式 NC blow-off valve, filter, silencer, non-return valve

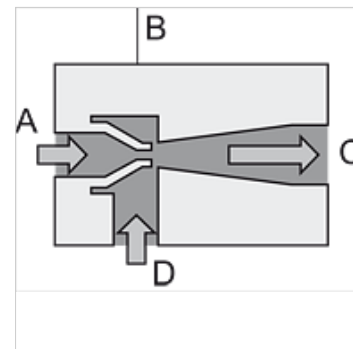

提示

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. 其它数据应客户要求提供。

描述

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

附加信息

Important: Order two connection plugs per ejector.

货品

名称	喷嘴尺寸	抽吸阀静止位置	压缩空气接口	真空接头	抽吸空气消耗 (L/min)	最大抽吸能力 (L/min)	尺寸	工作压力 (bar)
K- 07 45 01 46	1,0	NC	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5
K- 07 45 01 45	1,0	NO	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5

附件

K-ANSCHLUSSSTECK MAGNETVE 1	Connection plug for solenoid valves
K-ERSATZSCHALLDAEMPFER	Replacement silencers
K-ERSATZFILTERELEMENTE 1	Replacement filter element