
K-DRS
Pressure switch

HANSA FLEX

属性

测量介质接口	G 1/8 male and M 5 female
输出信号	2 x digital
结构类型	PNP
电接口	Male connector M8, four pin
滞后	Adjustable: 0 to 100% of set value or comparator mode
适用介质	Non-aggressive gases. dry, oil-free air
测量值显示器	3-digit 7-segment LED
开关性能	180 mA
电流消耗	55 mA
温度范围	0 - 50 °C
壳体	Polycarbonate
状态显示	2 x LED



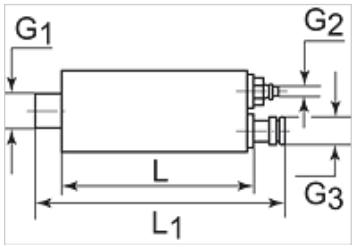

提示

其它数据应客户要求提供。

描述

Universal electronic pressure switch for safety monitoring, optimisation of cycle times and regulation circuits.
Its small size and low weight permit installation in handling systems directly at the point of use.

货品

名称	外侧 G1	内侧 G2	外侧 G3	L (mm)	L1 (mm)	测量范围	电压
K- 07 45 01 32	G 1/8	M 5	M 8 x 1	58,5	75,5	0 - 10 bar	10.8 - 30 V DC

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。