
K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

属性

结构类型	PNP
测量介质接口	G 1/8 male and M 5 female
滞后	Adjustable: 3 to 25% of set value
温度范围	0 - 50 °C
适用介质	Non-aggressive gases. dry, oil-free air
壳体	Polycarbonate
输出信号	Analogue: 1 to 5 V
电接口	Male connector M8, four pin
开关性能	125 mA
电流消耗	30 mA
状态显示	LED



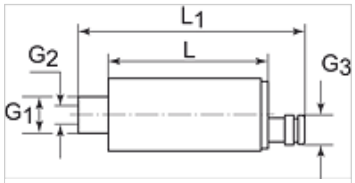

提示

其它数据应客户要求提供。

描述

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use.
Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

货品

名称	外侧 G1	内侧 G2	外侧 G3	L (mm)	L1 (mm)	测量范围	电压
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。