


# K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

**HANSA FLEX**

<b>属性</b>	
<b>结构类型</b>	PNP
<b>测量介质接口</b>	G 1/8 male and M 5 female
<b>滞后</b>	Adjustable: 3 to 25% of set value
<b>温度范围</b>	0 - 50 °C
<b>适用介质</b>	Non-aggressive gases, dry, oil-free air
<b>壳体</b>	Polycarbonate
<b>输出信号</b>	Analogue: 1 to 5 V
<b>电接口</b>	Male connector M8, four pin
<b>开关性能</b>	125 mA
<b>电流消耗</b>	30 mA
<b>状态显示</b>	LED

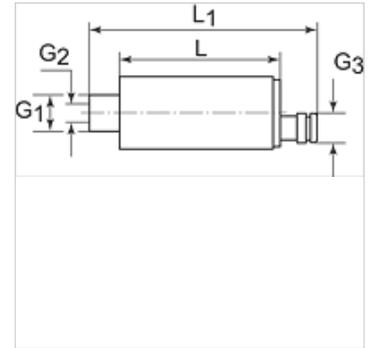

## 提示

其它数据应客户要求提供。

## 描述

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use. Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

## 货品

名称	外侧 G1	内侧 G2	外侧 G3	L (mm)	L1 (mm)	测量范围	电压
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC