

K-VAKUUMSCHALTER

Vacuum switch

HANSA FLEX

属性

测量介质接口 G 1/8 male and M 5 female

输出信号 Analogue: 1 to 5 V

电接口 Male connector M8, four pin

滞后 Adjustable: 3 to 25% of set value

适用介质 Non-aggressive gases. dry, oil-free air


开关功能 PNP

开关性能 125 mA

电流消耗 30 mA

温度范围 0 - 50 °C

壳体 Polycarbonate

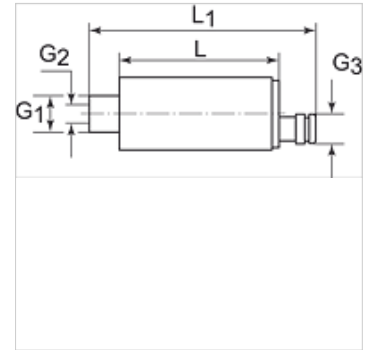

提示

其它数据应客户要求提供。

描述

Universal electronic vacuum switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly on the suction pad.
Switching point and hysteresis adjustable with a screw. Integrated LED for indication of the switching state.

货品

名称	外侧 G1	内侧 G2	外侧 G3	L (mm)	L1 (mm)	测量范围	电压
K- 07 45 01 58	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis 0 bar	10.8 - 30 V DC