

# K-VAKUUMSCHALTER

Vacuum switch

**HANSA FLEX**

## 属性

测量介质接口 G 1/8 male and M 5 female

输出信号 Analogue: 1 to 5 V

电接口 Male connector M8, four pin

滞后 Adjustable: 3 to 25% of set value

适用介质 Non-aggressive gases. dry, oil-free air


开关功能 PNP

开关性能 125 mA

电流消耗 30 mA

温度范围 0 - 50 °C

壳体 Polycarbonate

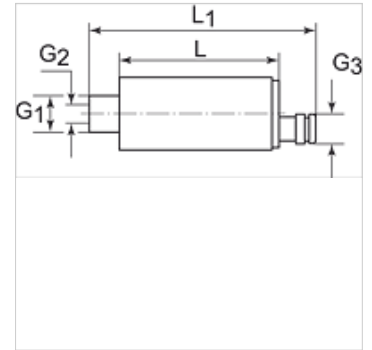

## 提示

其它数据应客户要求提供。

## 描述

Universal electronic vacuum switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly on the suction pad. <br>Switching point and hysteresis adjustable with a screw. Integrated LED for indication of the switching state.

## 货品

名称	外侧 G1	内侧 G2	外侧 G3	L (mm)	L1 (mm)	测量范围	电压
K- 07 45 01 58	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis 0 bar	10.8 - 30 V DC