
K-VAKUUMSENSOR ANALOG

Vacuum sensor, analogue

属性

应用	Measurement of vacuum values close to the suction pad Remote evaluation of the signals Processing the output signals, for example, by PLC
适用介质	dry, oil-free air and non-aggressive gases
温度范围	0 - 50 °C
输出信号	1 to 5 analogous to V
滞后	Fixed: 20 mbar (model with digital sensor)
线缆长度	3 m
保护等级	IP 40



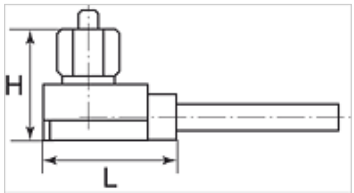

提示

其它数据应客户要求提供。

描述

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

货品

名称	接口	H (mm)	L (mm)	测量范围	电压
K- 07 45 01 56	M 5 male	16,9	21,0	-1 bis 0 bar	10 - 24 V DC

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。