


K-DRS ELK ANSCHLUSS M 1

Pressure switches, electrical connection M 12 x 1

属性

| | |
|-------|-------------------------------------|
| 应用范围 | Pneumatic applications |
| 开关频率 | 200/min. |
| 开关电压 | max. 250 V AC / 28 V DC |
| 保护等级 | IP 65 (DIN 43650), IP 67 (M 12 x 1) |
| 温度范围 | -10 °C to +80 °C |
| 调节盖罩 | Aluminium, powder-coated |
| 壳体 | Special die-cast material |
| 膜片,密封 | NBR |

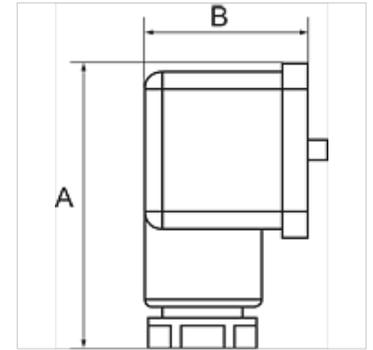

提示

其它数据应客户要求提供。

描述

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

货品

| 名称 | 接口 | 调节范围 | A (mm) | B (mm) |
|----------------|-------|----------------|-----------|-----------|
| K- 07 30 28 48 | G 1/4 | 0,2 - 2,0 bar | 48,0 | 28,0 |
| K- 07 30 28 49 | G 1/4 | 0,5 - 8,0 bar | 48,0 | 28,0 |
| K- 07 30 28 50 | G 1/4 | 1,0 - 16,0 bar | 48,0 | 28,0 |