K-DRS ELK ANSCHLUSS M 1


Pressure switches, electrical connection M 12 x 1

HANSA FLEX

属性

应用范围	Pneumatic applications
开关频度	200/min.
开关电压	max. 250 V AC / 28 V DC
保护等级	IP 65 (DIN 43650), IP 67 (M 12 x 1)
温度范围	-10 °C to +80 °C
调节盖罩	Aluminium, powder-coated
壳体	Special die-cast material
膜片,密封	NBR



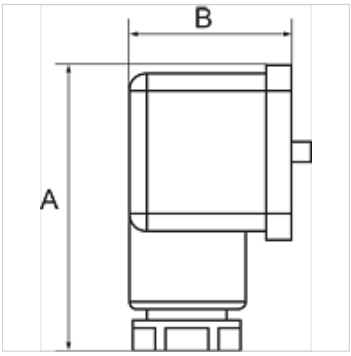

提示

其它数据应客户要求提供。

描述

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

货品

名称	接口	调节范围	A (mm)	B (mm)
K- 07 30 28 48	G 1/4	0,2 - 2,0 bar	48,0	28,0
K- 07 30 28 49	G 1/4	0,5 - 8,0 bar	48,0	28,0
K- 07 30 28 50	G 1/4	1,0 - 16,0 bar	48,0	28,0

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。