


# K-DRS ELK ANSCHLUSS M VAKUUM

Pressure switches, electrical connection M 12 x 1

**HANSA FLEX**

## 属性

应用范围	Pneumatic applications
开关频率	200/min.
开关电压	max. 250 V AC / 28 V DC
调节范围	-0.85 / +1 bar
保护等级	IP 65 (DIN 43650), IP 67 (M 12 x 1)
温度范围	-10 °C to +80 °C
调节盖罩	Aluminium, powder-coated
壳体	Special die-cast material
膜片,密封	Perbunan

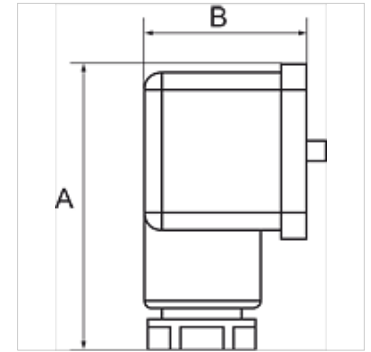

## 提示

其它数据应客户要求提供。

## 描述

For converting pneumatic to electrical signals. Designed for use in rough vacuum applications (technical vacuum). Universal switch type, suitable as NC, NO or changeover contact. These devices are free from paint-wetting impairment substances (PWIS).

## 货品

名称	接口	A (mm)	B (mm)
K- 07 30 28 52	法兰	48,0	28,0
K- 07 30 28 54	G 1/4	48,0	28,0