

K-BKR MINI GLATTE OBERFLAECHE

Mini ball valves

HANSA FLEX

属性

应用范围 Compressed air, water, oils, non-toxic gases

工作压力 最大 10 巴


介质温度 -10 °C to +80 °C

壳体 and 球体 Nickel-plated brass

手杆, 旋柄 Plastic

球密封 PTFE

主轴密封 NBR

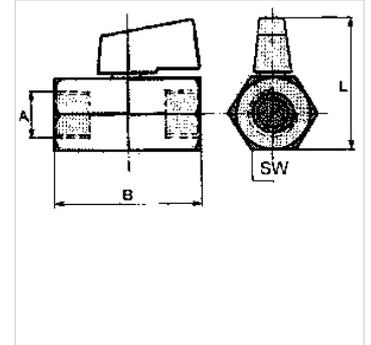

提示

其它数据应客户要求提供。

货品

| 名称 | 螺纹 | B (mm) | L (mm) | SW (mm) |
|----------------|---------------------|-----------|-----------|------------|
| K- 07 30 20 86 | G 1/8 female | 39,0 | 38,0 | 20 |
| K- 07 30 20 87 | G 1/4 female | 39,0 | 38,0 | 20 |
| K- 07 30 20 88 | G 3/8 female | 42,0 | 38,0 | 20 |
| K- 07 30 20 89 | G 1/2 female | 47,0 | 38,0 | 24 |
| K- 07 30 20 82 | G 1/8 female/male | 39,0 | 38,0 | 20 |
| K- 07 30 20 83 | G 1/4 female/male | 39,0 | 38,0 | 20 |
| K- 07 30 20 84 | G 3/8 female / male | 40,0 | 38,0 | 20 |
| K- 07 30 20 85 | G 1/2 female/male | 45,0 | 38,0 | 24 |