


K-MV G 230 V, 50 - 60 HZ Z

Normally closed, 230 V, 50 to 60 Hz, combined operation

HANSA FLEX

属性

| | |
|--------|--|
| 电接口 | For Pg 11P connector socket, acc. to DIN 4400 |
| 保护等级 | IP65 (with connector socket fitted) |
| 介质温度 | max. +90 °C with Perbunan-seal; max. +130 °C with FKM-Seal |
| 壳体, 阀座 | Stainless steel |
| 内部部件 | Stainless steel |
| 密封 | Perbunan (NBR) or FKM |

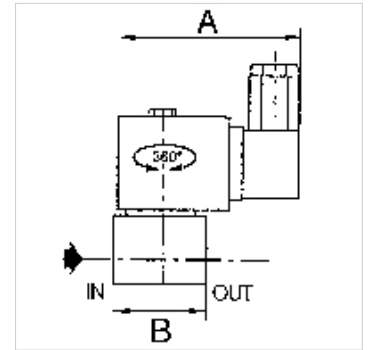

提示

其它数据应客户要求提供。

描述

Available versions, Directly operated, Combined operation

货品

| 名称 | 螺纹 | 最大工作压力 (bar) | NW | 密封材料 | A (mm) | B (mm) | 结构形式 |
|----------------|-------|-----------------|------|------|-----------|-----------|------|
| K- 07 30 22 99 | G 1/2 | 9 | 16,0 | NBR | 80,0 | 71,0 | 3 |
| K- 07 30 23 01 | G 1/2 | 9 | 16,0 | FKM | 80,0 | 71,0 | 3 |
| K- 07 30 23 00 | G 3/4 | 9 | 16,0 | NBR | 80,0 | 71,0 | 3 |