


# K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## 属性

电接口	For Pg 11P connector socket, acc. to ISO 4400
保护等级	IP65 (with connector socket fitted)
螺纹描述	Rp thread acc. to ISO 7-1
壳体, 阀座	Brass
内部部件	Stainless steel
密封	Perbunan (NBR)

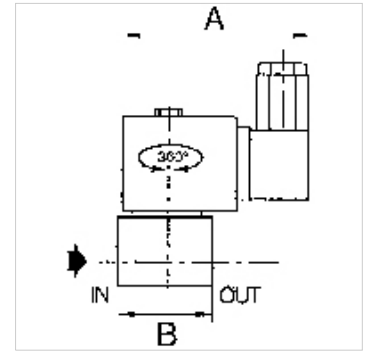

## 提示

其它数据应客户要求提供。

## 描述

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## 货品

名称	螺纹	最大工作压力 (bar)	NW	A (mm)	B (mm)	结构形式
K- 07 30 22 52	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 22 53	Rp 1/4	6	3,2	80,0	43,0	10