K-MV 3/2 ELK


Solenoid valves

HANSA-FLEX

属性

保护等级	IP65 (with connector socket fitted)
介质温度	-10 °C to +100 °C
排气接口	M 5
应用	Compressed air and neutral, non-toxic gases, not suitable for liquids
工作压力	min. 0,0 bar; max. 15,0 bar
电气部件	system connection plug, 180° movement, PG7 exchangeble magnetic heads AC/DC
公称内径	1,2 mm
环境温度	-10 °C to +60 °C
壳体	Brass
内部部件	Stainless steel
密封	FPM



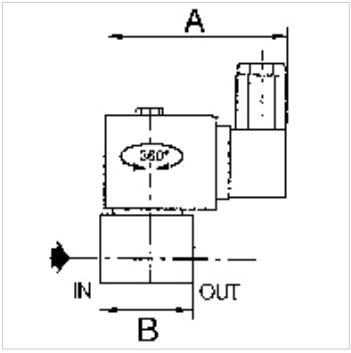

提示

其它数据应客户要求提供。

描述

Directly operated seat valve with spring return and manual operator. Also suitable for vacuum operation.

货品

名称	螺纹	电压	A (mm)	B (mm)
K- 07 30 22 50	G 1/8	230/50 V AC, 50 Hz	58,0	33,0
K- 07 30 22 51	G 1/8	24 V DC	58,0	33,0

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。