


K-MV 3/2 ELK

Solenoid valves

HANSA FLEX

| | |
|-----------|-----------------------------------------------------------------------------|
| 属性 | |
| 保护等级 | IP65 (with connector socket fitted) |
| 介质温度 | -10 °C to +100 °C |
| 排气接口 | M 5 |
| 应用 | Compressed air and neutral, non-toxic gases, not suitable for liquids |
| 工作压力 | min. 0,0 bar; max. 15,0 bar |
| 电气部件 | system connection plug, 180° movement, PG7 exchangeble magnetic heads AC/DC |
| 公称内径 | 1,2 mm |
| 环境温度 | -10 °C to +60 °C |
| 壳体 | Brass |
| 内部部件 | Stainless steel |
| 密封 | FPM |

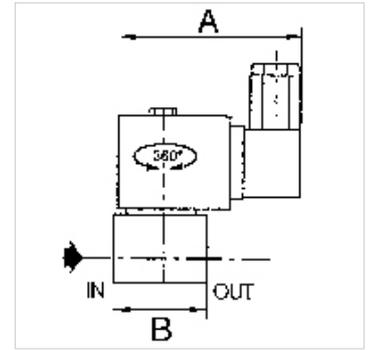

提示

其它数据应客户要求提供。

描述

Directly operated seat valve with spring return and manual operator. Also suitable for vacuum operation.

货品

| 名称 | 螺纹 | 电压 | A (mm) | B (mm) |
|----------------|-------|--------------------|-----------|-----------|
| K- 07 30 22 50 | G 1/8 | 230/50 V AC, 50 Hz | 58,0 | 33,0 |
| K- 07 30 22 51 | G 1/8 | 24 V DC | 58,0 | 33,0 |