


K-MV O D 230 V, 50 - 60 HZ

Normally open, directly operated, 230 V, 50 to 60 Hz



属性	
电接口	For connector socket Pg 9/Pg 11, acc. to ISO 4400
保护等级	IP65 (with connector socket fitted)
介质温度	-10 °C to +90 °C (NBR); -10 °C bis +140 °C (FKM)
壳体,阀座	Brass
内部部件	Stainless steel
密封	Perbunan (NBR) or FKM

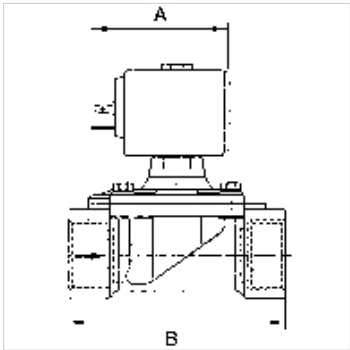

提示
其它数据应客户要求提供。

描述
Economy series available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

货品							
名称	螺纹	最大工作压力 (bar)	NW	密封材料	A (mm)	B (mm)	结构形式
K- 07 30 23 66	G 1/8	20	2,0	FKM	54,0	40,0	2
K- 07 30 23 67	G 1/8	14	2,5	FKM	54,0	40,0	2
K- 07 30 23 68	G 1/4	10	3,0	FKM	54,0	40,0	2
K- 07 30 23 69	G 1/4	4	4,5	FKM	54,0	40,0	2