


K-MV G D 24 V DC

Normally closed, directly operated, 24 V DC (direct current)

HANSA FLEX

属性

电接口	ISO 4400. cable socket (Pg 11P)
保护等级	IP65 (with connector socket fitted)
介质温度	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
螺纹描述	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
壳体, 阀座	Brass
内部部件	Stainless steel
密封	Perbunan (NBR) or FKM

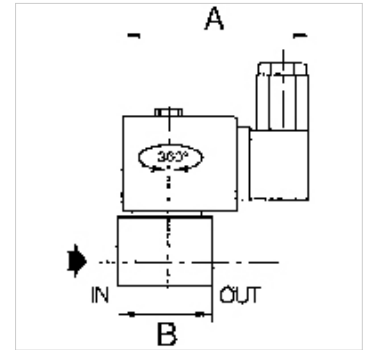

提示

其它数据应客户要求提供。

描述

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

货品

名称	螺纹	最大工作压力 (bar)	NW	密封材料	A (mm)	B (mm)	结构形式
K- 07 30 23 08	G 1/8	5	3,2	NBR	75,0	30,0	1
K- 07 30 23 10	G 1/8	5	3,2	FKM	75,0	30,0	1
K- 07 30 23 09	G 1/4	4	3,2	NBR	75,0	40,0	2
K- 07 30 23 11	G 1/4	4	3,2	FKM	75,0	40,0	2