


K-MV G Z 230 V, 50 - 60 HZ 1

Normally closed, combined operation, 230 V, 50 to 60 Hz

HANSA FLEX

属性

电接口	ISO 4400. cable socket (Pg 11P)
保护等级	IP65 (with connector socket fitted)
介质温度	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
螺纹描述	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
壳体, 阀座	Brass
内部部件	Stainless steel
密封	Perbunan (NBR) or FKM

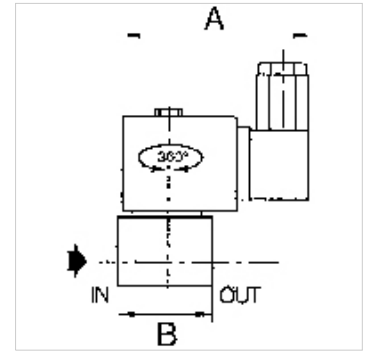

提示

其它数据应客户要求提供。

描述

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

货品

名称	螺纹	最大工作压力 (bar)	NW	密封材料	A (mm)	B (mm)	结构形式
K- 07 30 22 84	Rp 3/8	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 90	Rp 3/8	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 85	Rp 1/2	9	16,0	NBR	80,0	70,0	3
K- 07 30 22 91	Rp 1/2	9	16,0	FKM	80,0	70,0	3
K- 07 30 22 86	Rp 3/4	9	19,0	NBR	80,0	70,0	3
K- 07 30 22 92	Rp 3/4	9	19,0	FKM	80,0	70,0	3
K- 07 30 22 87	Rp 1	9	25,0	NBR	86,0	95,0	3
K- 07 30 22 93	Rp 1	9	25,0	FKM	86,0	95,0	3
K- 07 30 22 88	Rp 1 1/4	9	28,0	NBR	86,0	95,0	3
K- 07 30 22 89	Rp 1 1/2	9	32,0	FKM	86,0	111,0	3