


# K-MV O D 230 V, 50 - 60 HZ 1

Normally open, directly operated, 230 V, 50 to 60 Hz

## 属性

电接口	ISO 4400. cable socket (Pg 11P)
保护等级	IP65 (with connector socket fitted)
介质温度	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
螺纹描述	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
壳体, 阀座	Brass
内部部件	Stainless steel
密封	Perbunan (NBR) or FKM

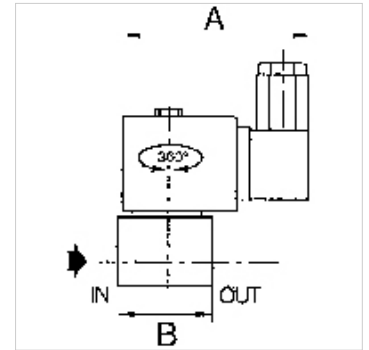

## 提示

其它数据应客户要求提供。

## 描述

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## 货品

名称	螺纹	最大工作压力 (bar)	NW	密封材料	A (mm)	B (mm)	结构形式
K- 07 30 23 62	Rp 1/8	20	2,4	NBR	75,0	33,0	7
K- 07 30 23 64	Rp 1/8	20	2,4	FKM	75,0	33,0	1
K- 07 30 23 63	G 1/4	9	3,2	NBR	80,0	40,0	2
K- 07 30 23 65	G 1/4	9	3,2	FKM	80,0	40,0	2