


K-SPV DOPPEL

Check valves, double-acting

HANSA FLEX

属性

| | |
|---------|--|
| 工作压力 | 最大 10 巴 |
| 控制压力 | min. 3.0 bar, max. 8 bar with double-acting actuator; min. 4.2 bar, max. 8 bar for single-drive |
| 温度 | -20 °C to +80 °C (NBR); -20 °C to +150 °C (FKM) |
| 接口 | NAMUR-Interface, direct: 2 x G 1/8 |
| 装入位置 | Any |
| 壳体,内部部件 | Nickel-plated brass |
| 弹簧 | Stainless-steel |
| 密封材料 | Perbunan (NBR) or FKM (FPM) |

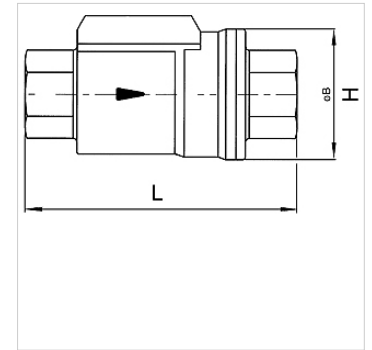

提示

其它数据应客户要求提供。

描述

2/2-way check valves, specially designed for automated industrial plant engineering. A low-price, compact, space-saving and reliable alternative to ball valves with a pneumatic rotary actuator.
These valves have a full bore.

货品

| 名称 | DN | 螺纹 | 密封材料 | H (mm) | L (mm) |
|----------------|----|--------|------|-----------|-----------|
| K- 07 30 25 37 | 10 | Rp 3/8 | NBR | 46,0 | 98,0 |
| K- 07 30 25 38 | 15 | Rp 1/2 | NBR | 51,7 | 112,0 |
| K- 07 30 25 39 | 20 | Rp 3/4 | NBR | 63,5 | 135,0 |
| K- 07 30 25 40 | 25 | Rp 1 | NBR | 69,0 | 143,0 |
| K- 07 30 25 41 | 10 | Rp 3/8 | FKM | 46,0 | 98,0 |
| K- 07 30 25 42 | 15 | Rp 1/2 | FKM | 51,7 | 112,0 |
| K- 07 30 25 43 | 20 | Rp 3/4 | FKM | 63,5 | 135,0 |
| K- 07 30 25 44 | 25 | Rp 1 | FKM | 69,0 | 143,0 |