


# K-W90 STUECK IG AG RP-GEW

90° elbows, female-male, female thread: Rp thread acc. to ISO 7-1,  
male thread: R thread acc. to ISO 7-1

**HANSA FLEX**

## 属性

|      |                                 |
|------|---------------------------------|
| 工作压力 | 最大 20 巴                         |
| 工作温度 | Max. 175 °C                     |
| 内螺纹  | Rp-thread acc. ISO 7-1          |
| 原料   | Stainless steel 1.4401 / 1.4408 |
| 外螺纹  | R-thread acc. ISO 7-1           |

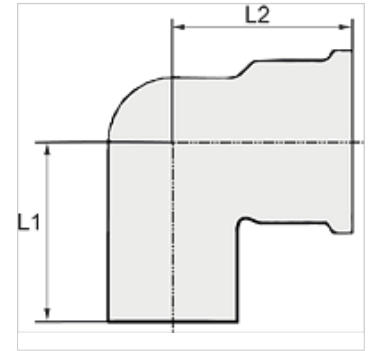

## 提示

其它数据应客户要求提供。

## 货品

| 名称             | 螺纹                        | L1<br>(mm) | L2<br>(mm) |
|----------------|---------------------------|------------|------------|
| K- 07 40 10 33 | Rp 1/8 female, R 1/8 male | 24,0       | 17,0       |
| K- 07 40 10 34 | Rp 1/4 female, R 1/4 male | 28,0       | 20,0       |
| K- 07 40 10 35 | Rp 3/8 female, R 3/8 male | 32,0       | 22,0       |
| K- 07 40 10 36 | Rp 1/2 female, R 1/2 male | 38,0       | 27,0       |
| K- 07 40 10 37 | Rp 3/4 female, R 3/4 male | 45,0       | 32,0       |
| K- 07 40 10 38 | Rp 1 female, R 1 male     | 52,0       | 37,0       |