



# K-T-STUECKE IG AG IG 2 2

Tees, female-male-female

**HANSA FLEX**

## 属性

|      |                                 |
|------|---------------------------------|
| 工作压力 | 60 bar                          |
| 工作温度 | Max. 150 °C                     |
| 内螺纹  | Parallel to DIN EN ISO 228-1    |
| 原料   | Brass with a bare metal surface |
| 外螺纹  | conical acc. DIN 2999           |

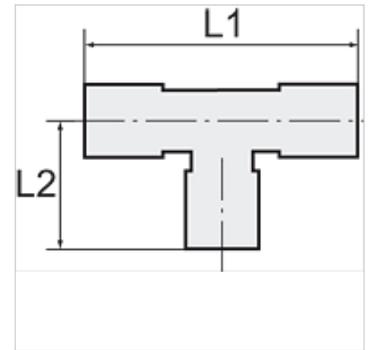

## 提示

其它数据应客户要求提供。

## 货品

| 名称             | 螺纹      | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|------------|------------|-------|
| K- 07 40 11 62 | G/R 1/8 | 42,0       | 18,5       | 10 mm |
| K- 07 40 11 63 | G/R 1/4 | 51,0       | 23,5       | 13 mm |
| K- 07 40 11 64 | G/R 3/8 | 56,0       | 26,0       | 17 mm |
| K- 07 40 11 65 | G/R 1/2 | 67,0       | 31,0       | 21 mm |
| K- 07 40 11 66 | G/R 3/4 | 73,0       | 33,0       | 25 mm |
| K- 07 40 11 67 | G/R 1   | 90,0       | 39,0       | 30 mm |