


属性

工作压力 最大 10 巴
温度范围 -20 °C to +80 °C

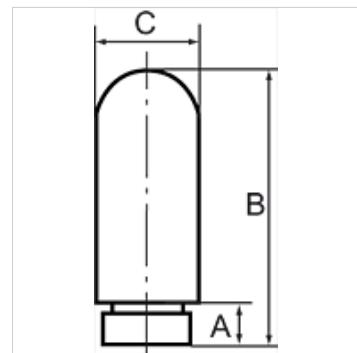

提示

Important: The air flowing through the silencer is cooled down. at temperatures below zero, the moisture in the air can freeze, causing the pores of the silencer to close up.

其它数据应客户要求提供。

货品

名称	螺纹	A (mm)	B (mm)	C (mm)
K-07 40 46 90	M 5	5,0	25,0	7,0
K-07 40 40 61	G 1/8	7,0	32,0	13,0
K-07 40 40 62	G 1/4	8,0	39,0	17,0
K-07 40 40 63	G 3/8	11,0	65,0	25,0
K-07 40 40 64	G 1/2	11,5	70,0	25,0
K-07 40 40 65	G 3/4	15,5	138,0	37,0
K-07 40 40 66	G 1	19,5	158,0	48,0