



# K-GAR IG

Female connectors with female G thread

**HANSA FLEX**

## 属性

|       |   |
|-------|---|
| 工作压力  | Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C) |
| 螺旋接头体 | Polyamide (PA)  |
| 夹紧环   | Polypropylene (PP)  |
| 螺母    | Polypropylene (PP)  |

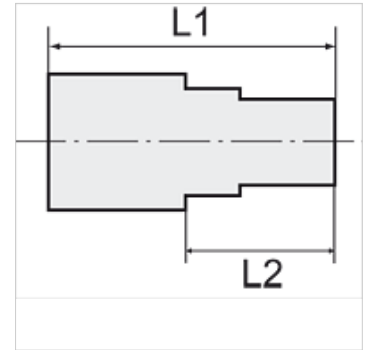

## 提示

其它数据应客户要求提供。

## 描述

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzene, diesel oil, fuel oil and alkalis. <br>Not suitable for use with acids.

## 货品

| 名称             | 螺纹    | 用于软管         | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|-------|--------------|------------|------------|-------|
| K- 07 40 32 46 | G 1/8 | 4 mm / 6 mm  | 31,0       | 17,0       | 14 mm |
| K- 07 40 32 47 | G 1/8 | 6 mm / 8 mm  | 36,0       | 21,0       | 17 mm |
| K- 07 40 32 48 | G 1/8 | 8 mm / 10 mm | 39,0       | 24,0       | 19 mm |
| K- 07 40 32 49 | G 1/8 | 9 mm / 12 mm | 43,0       | 28,0       | 22 mm |
| K- 07 40 32 50 | G 1/4 | 4 mm / 6 mm  | 36,0       | 17,0       | 17 mm |
| K- 07 40 32 51 | G 1/4 | 6 mm / 8 mm  | 41,0       | 21,0       | 17 mm |
| K- 07 40 32 52 | G 1/4 | 8 mm / 10 mm | 44,0       | 24,0       | 19 mm |
| K- 07 40 32 53 | G 1/4 | 9 mm / 12 mm | 48,0       | 28,0       | 22 mm |
| K- 07 40 32 54 | G 3/8 | 4 mm / 6 mm  | 36,0       | 17,0       | 22 mm |
| K- 07 40 32 55 | G 3/8 | 6 mm / 8 mm  | 41,0       | 21,0       | 22 mm |
| K- 07 40 32 56 | G 3/8 | 8 mm / 10 mm | 44,0       | 24,0       | 22 mm |
| K- 07 40 32 57 | G 3/8 | 9 mm / 12 mm | 48,0       | 28,0       | 22 mm |
| K- 07 40 32 58 | G 1/2 | 4 mm / 6 mm  | 38,0       | 17,0       | 27 mm |
| K- 07 40 32 59 | G 1/2 | 6 mm / 8 mm  | 42,0       | 21,0       | 27 mm |
| K- 07 40 32 60 | G 1/2 | 8 mm / 10 mm | 44,0       | 24,0       | 27 mm |
| K- 07 40 32 61 | G 1/2 | 9 mm / 12 mm | 49,0       | 28,0       | 27 mm |