


K-W90 VERBINDER POM

Union elbows

HANSA FLEX

属性

| | |
|------|---|
| 工作压力 | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |
| 工作温度 | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| 原料 | Acetalpolymerisat (POM) |
| 密封材料 | NBR |

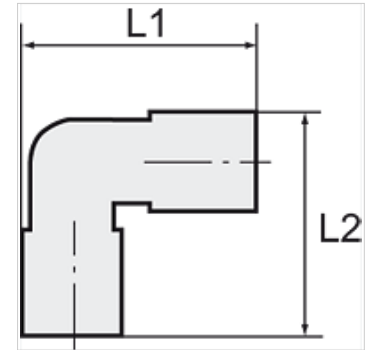

提示

其它数据应客户要求提供。

描述

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

货品

| 名称 | 用于软管外径-Ø | L1 (mm) | L2 (mm) |
|----------------|----------|------------|------------|
| K- 07 40 28 52 | 4 mm | 25,1 | 25,1 |
| K- 07 40 28 53 | 5 mm | 25,1 | 25,1 |
| K- 07 40 28 54 | 6 mm | 28,1 | 28,1 |
| K- 07 40 28 55 | 8 mm | 30,9 | 30,9 |
| K- 07 40 28 56 | 10 mm | 36,2 | 36,2 |
| K- 07 40 28 57 | 12 mm | 45,0 | 45,0 |
| K- 07 40 28 58 | 15 mm | 51,4 | 51,4 |
| K- 07 40 28 59 | 18 mm | 60,9 | 60,9 |
| K- 07 40 28 60 | 22 mm | 67,4 | 67,4 |
| K- 07 40 28 61 | 28 mm | 87,7 | 87,7 |