



K-SCHLAUCHTUELLEN ES

Hose fittings

HANSA FLEX

属性

| | |
|------|-------------|
| 工作压力 | Max. 20 bar |
| 原料 | 不锈钢 1.4571 |

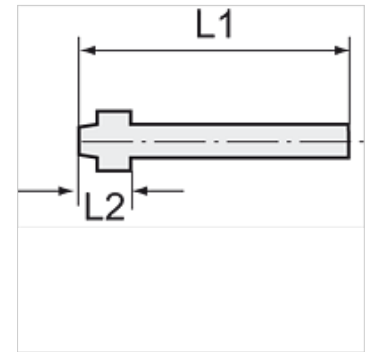

提示

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
其它数据应客户要求提供。

附加信息

Further types and dimensions on request.

货品

| 名称 | 用于软管 | 用于锁紧螺母 | L1 (mm) | L2 (mm) |
|----------------|----------|--------|------------|------------|
| K- 07 40 16 51 | LW 6 mm | G 1/8 | 33,5 | 6,0 |
| K- 07 40 16 44 | LW 4 mm | G 1/4 | 47,0 | 13,5 |
| K- 07 40 16 45 | LW 6 mm | G 1/4 | 47,0 | 13,5 |
| K- 07 40 16 46 | LW 9 mm | G 1/4 | 47,0 | 14,0 |
| K- 07 40 16 47 | LW 6 mm | G 3/8 | 48,5 | 15,0 |
| K- 07 40 16 48 | LW 9 mm | G 3/8 | 48,5 | 15,0 |
| K- 07 40 16 49 | LW 9 mm | G 1/2 | 48,5 | 15,0 |
| K- 07 40 16 50 | LW 13 mm | G 1/2 | 48,5 | 15,0 |