


K-SV MS NI

Bulkhead connectors - nickel-plated brass

HANSA FLEX

属性

工作温度	Max. 150 °C
压力	Max. 60 bar
原料	黄铜镀镍

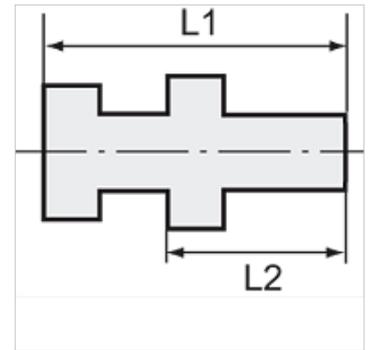

提示

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
其它数据应客户要求提供。

描述

Suitable for air, water, oil, steam, etc.

附加信息

Further types and dimensions on request.

货品

名称	外螺纹	内螺纹	L1 (mm)	L2 (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 34 27	M 16 x 1.5	G 1/8	18,0	14,0	22	19
K- 07 40 34 28	M 20 x 1.5	G 1/4	26,0	21,0	24	27
K- 07 40 34 29	M 26 x 1.5	G 3/8	26,0	21,0	32	30
K- 07 40 34 30	M 28 x 1.5	G 1/2	33,5	27,0	32	36