
K-VLST 2 X IG MS NI


Extensions, 2 x female thread, parallel - nickel-plated brass

HANSA-FLEX

属性

工作温度	Max. 150 °C
压力	Max. 60 bar
原料	黄铜镀镍



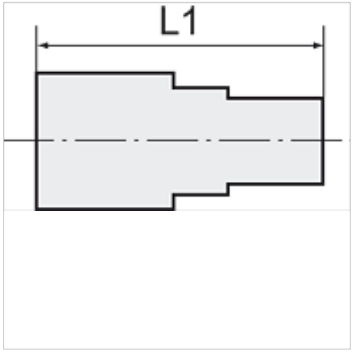

提示

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
其它数据应客户要求提供。

描述

Suitable for air, water, oil, steam, etc.

附加信息

Further types and dimensions on request.

货品

名称	螺纹 1	螺纹 2	L1 (mm)	SW
K- 07 40 39 09	M 5	G 1/8	13,5	14 mm
K- 07 40 39 10	G 1/8	G 1/4	21,5	17 mm
K- 07 40 39 11	G 1/8	G 3/8	23,5	22 mm
K- 07 40 39 12	G 1/4	G 3/8	25,5	22 mm
K- 07 40 39 13	G 1/4	G 1/2	28,5	24 mm
K- 07 40 39 14	G 3/8	G 1/2	29,5	24 mm
K- 07 40 39 15	G 1/2	G 3/4	30,0	32 mm
K- 07 40 43 91	G 1/2	G 1/8	24,0	24 mm
K- 07 40 43 92	G 1	G 3/4	25,0	38 mm

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。