


# K-SCHWENKTUELLE MS

Swivel hose fittings, parallel male thread

**HANSA FLEX**

## 属性

工作压力	10 bar
介质温度	max. +90 °C
环境温度	Max. +90 °C
原料	Nickel-plated brass (banjo bolt), brass (ring nipple)

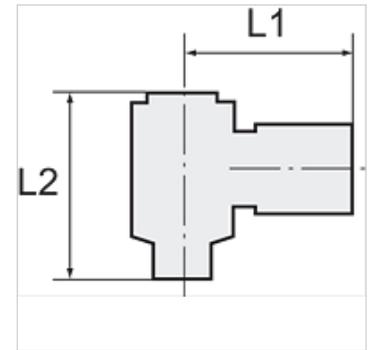

## 提示

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. 其它数据应客户要求提供。

## 附加信息

Further types and dimensions on request.

## 货品

名称	螺纹	用于软管	L1 (mm)	L2 (mm)	SW
K- 07 40 34 39	G 1/8	LW 4 mm	26,0	28,0	14 mm
K- 07 40 34 40	G 1/8	LW 6 mm	26,0	28,0	14 mm
K- 07 40 34 41	G 1/4	LW 6 mm	28,0	29,0	17 mm
K- 07 40 34 42	G 1/4	LW 9 mm	28,0	30,5	17 mm
K- 07 40 34 43	G 3/8	LW 6 mm	30,0	32,0	22 mm
K- 07 40 34 44	G 3/8	LW 9 mm	30,0	32,0	22 mm