



# K-XV VALUE LINE MS NI

Double nipples

**HANSA FLEX**

## 属性

|        |        |
|--------|--------|
| 最大工作压力 | 60 bar |
| 最大工作温度 | 150 °C |
| 原料     | 黄铜镀镍   |

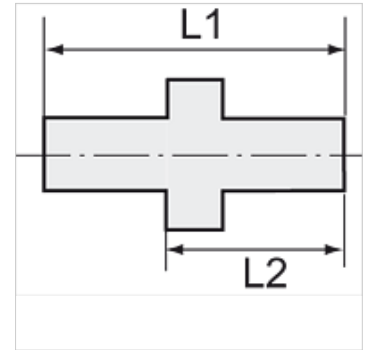

## 提示

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. 其它数据应客户要求提供。

## 描述

For air, water, steam, oil, etc.

## 货品

| 名称             | 螺纹 1  | 螺纹 2  | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|-------|-------|------------|------------|-------|
| K- 07 40 12 95 | M 5   | M 5   | 11,5       | 7,5        | 8 mm  |
| K- 07 40 12 96 | G 1/8 | G 1/8 | 16,5       | 10,5       | 14 mm |
| K- 07 40 12 97 | G 1/8 | G 1/4 | 19,0       | 13,0       | 17 mm |
| K- 07 40 12 98 | G 1/4 | G 1/4 | 21,0       | 13,0       | 17 mm |
| K- 07 40 12 99 | G 1/4 | G 3/8 | 22,0       | 14,0       | 19 mm |
| K- 07 40 13 00 | G 1/4 | G 1/2 | 23,5       | 15,5       | 24 mm |
| K- 07 40 13 01 | G 3/8 | G 3/8 | 23,0       | 14,0       | 19 mm |
| K- 07 40 13 02 | G 3/8 | G 1/2 | 24,5       | 15,5       | 24 mm |
| K- 07 40 13 03 | G 1/2 | G 1/2 | 25,5       | 15,5       | 24 mm |