

K-VTL KUGELHAEHNE
Distributor block

HANSA-FLEX

属性	
固定	2 mounting holes in housing (screw size M 5)
压力范围	Max. +10 bar, rough vacuum
温度范围	-10 °C to +100 °C
球阀螺纹	G 1/4
壳体	Die-cast aluminium
球体,主轴	Ms 58, chrome-plated
球密封	PTFE
O 形圈	NBR



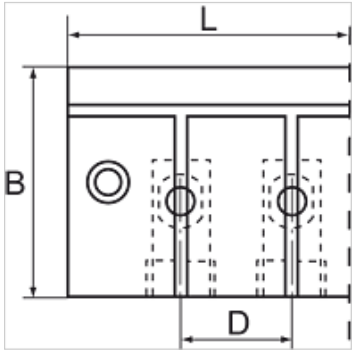

提示
其它数据应客户要求提供。

描述
Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.
Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

货品

名称	球阀数量	螺纹 出口	螺纹 入口	B (mm)	D (mm)	L (mm)
K- 07 40 40 46	6	G 3/8	G 3/8"	52,0	25,0	175,0
K- 07 40 40 47	8	G 3/8	G 3/8"	52,0	25,0	225,0
K- 07 40 40 45	10	G 3/8	G 3/8"	52,0	25,0	275,0

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。