

K-VTST 3 AB MS


Distributor pieces, brass, with 3 outlets

HANSA**FLEX**

属性

接口 G 3/4 and G 1 incl. PTFE-sealing at outer thread, G 1 1/4 without sealing

工作压力 最大 10 巴

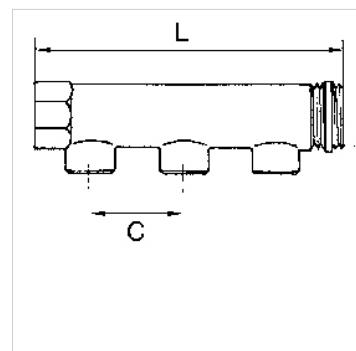

提示

其它数据应客户要求提供。

描述

For assembling compressed air taps. End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

货品

| 名称 | 输出端接口 | 输入端接口 | C (mm) | L (mm) |
|---------------|----------------|-----------|-----------|-----------|
| K-07 40 40 55 | 3 x 1/2 male | 2 x 3/4 | 50,0 | 160,0 |
| K-07 40 40 56 | 3 x 1/2 female | 2 x 3/4 | 50,0 | 160,0 |
| K-07 40 40 57 | 3 x 1/2 male | 2 x 1 | 50,0 | 163,0 |
| K-07 40 40 58 | 3 x 1/2 female | 2 x 1 | 50,0 | 163,0 |
| K-07 40 40 59 | 3 x 1/2 male | 2 x 1 1/4 | 60,0 | 197,0 |
| K-07 40 40 60 | 3 x 1/2 female | 2 x 1 1/4 | 60,0 | 197,0 |