
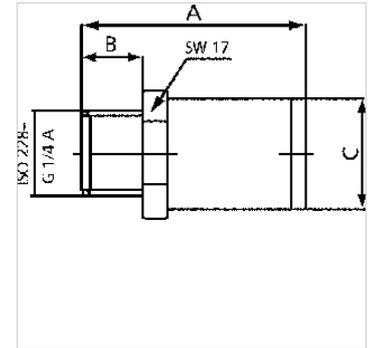


K-DRGREDV

Pressure reducing valves

属性

| | |
|------|---------------------------|
| 入口压力 | Max. 15 bar |
| 接口 | G 1/4 internal / external |
| 原料 | 黄铜 |



提示

Dependent on the input pressure P1, the initial pressure P2 can vary between -20% to +20%
其它数据应客户要求提供。

描述

Industry, trade and repair shops often require working pressures of 15 bar or less. These pressure reducing valves, which are screwed directly onto the tool, enable the actually necessary working pressure to be set.
Benefits: Significantly reduced risk of accidents, Longer tool life with fewer malfunctions, Lower noise levels at the workplace.

货品

| 名称 | 调节压力 | 最大流量 (L/min) | A (mm) | B | Ø C (mm) | SW (mm) |
|----------------|------|-----------------|-----------|--------|-------------|------------|
| K- 07 25 19 31 | 2,0 | 300 | 34,0 | 9,0 mm | 17,0 | 17 |
| K- 07 25 02 00 | 3,0 | 360 | 34,0 | 9,0 mm | 17,0 | 17 |
| K- 07 25 02 01 | 4,0 | 380 | 34,0 | 9,0 mm | 17,0 | 17 |
| K- 07 25 02 02 | 5,0 | 390 | 34,0 | 9,0 mm | 17,0 | 17 |
| K- 07 25 02 03 | 6,0 | 405 | 34,0 | 9,0 mm | 17,0 | 17 |
| K- 07 25 19 32 | 7,0 | 415 | 34,0 | 9,0 mm | 17,0 | 17 |
| K- 07 25 19 33 | 8,0 | 420 | 34,0 | 9,0 mm | 17,0 | 17 |