


# K-PRAEZI DRUCKREGL MEM SELU

Precision pressure regulators

**HANSA FLEX**

## 属性

|        |  |
|--------|--|
| 入口压力   | Max. 16 bar  |
| 介质温度   | max. 60 °C   |
| 环境温度   | Max. 60 °C   |
| 适用介质   | Micro-filtered, unoled compressed air (0.01 µm)                |
| 压力计接口  | G 1/8  |
| 密封材料   | NBR  |
| 壳体     | Die-cast zinc  |
| 自身空气消耗 | 2.2 - 4.5 l/min, depending on input pressure and control range |

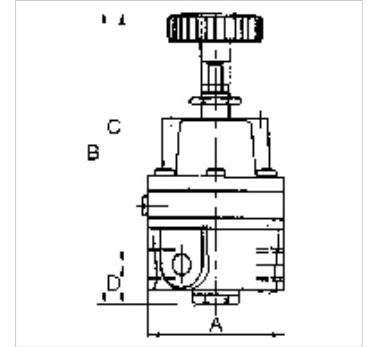

## 提示

The given flow rates are based on the following parameters: 450 l/min: P1: 5 bar, P2: 2 bar,  $\Delta p \leq 0.1$  bar

570 l/min: P1: 7 bar, P2: 4 bar,  $\Delta p \leq 0.1$  bar

Attention! Wear parts kit not supplied! Pressure regulator may only be opened in the factory! 850 l/min: P1: 10 bar, P2: 7 bar,  $\Delta p \leq 0.1$  bar.

其它数据应客户要求提供。

## 描述

Diaphragm pressure regulators with self-relieving design for applications requiring an extremely accurate working pressure.

## 附加信息

1500 l/min: P1: 10 bar, P2: 7 bar,  $\Delta p \leq 0.1$  bar.

## 货品

| 名称             | 螺纹    | 调节范围         | 流量<br>(L/min) | A<br>(mm) | B        | C<br>(mm) | D<br>(mm) |
|----------------|-------|--------------|---------------|-----------|----------|-----------|-----------|
| K- 07 25 09 43 | G 1/4 | 0.05 - 2 bar | 450           | 58,0      | 124,0 mm | 107,0     | 17,0      |
| K- 07 25 09 44 | G 1/4 | 0.05 - 4 bar | 570           | 58,0      | 124,0 mm | 107,0     | 17,0      |
| K- 07 25 09 45 | G 1/4 | 0.05 - 7 bar | 850           | 58,0      | 124,0 mm | 107,0     | 17,0      |

## 备件

|                 |                                      |
|-----------------|--------------------------------------|
| K-HALTERBAUSATZ | Holder                               |
| K-FILTERELEMENT | Filter element                       |
| K-MANO NIPPEL   | Nipples for pressure gauges          |
| K-XV AGM 2      | Double nipples, parallel male thread |