
# K-3/2-BKR HANSA

Ball valves

## 属性

| | |
|---|---|
| **入口压力** | 0 - 16 bar |
| **温度范围** | -10 °C to +50 °C |
| **适用介质** | 压缩空气 |
| **接口螺纹** | Material: Die-cast zinc |
| **壳体** | Material: Grivory® (PA 66) |
| **流量值测量** | At P2 = 6 bar, pressure drop Δp = 1 bar |



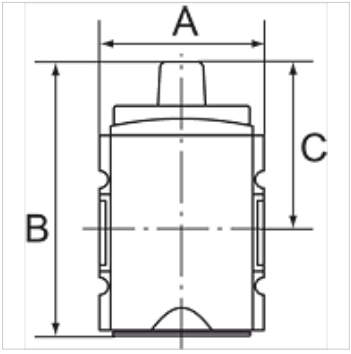


## 提示

其它数据应客户要求提供。

## 描述

Closable ball valve in 3/2-way design, mechanically actuated. Toggle 90° rotatable and with switch position indicator: Traverse: Inlet port blocked - outlet port exhausted
Longitudinal: Inlet port and outlet port connected - exhaust blocked. Exhaust air can be collected.

## 附加信息

The price does not include a padlock. Please order separately.

## 货品

| 名称 | 螺纹 | 出口 | 流量 (L/min) | A (mm) | B | C (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 11 23** | G 1/4 | 1/4 | 1900 | 52,0 | 87,5 mm | 54,5 |
| **K- 07 25 11 24** | G 3/8 | 1/4 | 1900 | 52,0 | 87,5 mm | 54,5 |
| **K- 07 25 11 43** | G 3/8 | 1/2 | 11000 | 63,0 | 127,0 mm | 70,5 |
| **K- 07 25 11 44** | G 1/2 | 1/2 | 11000 | 63,0 | 127,0 mm | 70,5 |
| **K- 07 25 11 45** | G 3/4 | 3/4 | 25000 | 85,0 | 144,7 mm | 93,7 |
| **K- 07 25 11 46** | G 1 | 3/4 | 25000 | 85,0 | 144,7 mm | 93,7 |

## 附件

| | |
|---|---|
| **K-VORHAENGESCHLOSS** | Padlock |

## 备件

| | |
|---|---|
| **K-HALTERBAUSATZ HANSA** | Holder HANSA |

*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*