


K-FI REGL PC-BEHÄLTER S MANO MULTIFIX

Filter regulators with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

属性

| | |
|-------------|--|
| 入口压力 | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| 介质温度 | max. 60 °C |
| 环境温度 | Max. 60 °C |
| 过滤器元件中的气孔宽度 | 5 µm (C55: 40 µm) |
| 密封材料 | NBR |
| 弹簧罩 | POM-brass |
| 壳体 | Die-cast zinc, Aluminium for G 1 variant |
| Drain valve | Semi-automatic |
| 流量值测量 | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

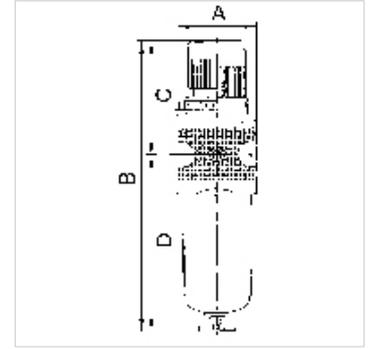

提示

其它数据应客户要求提供。

描述

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

订购指南

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

货品

| 名称 | 螺纹 | 调节范围 | 流量 (L/min) | A (mm) | B | C (mm) | D (mm) | DN | 结构尺寸 |
|----------------|-------|--------------|---------------|-----------|----------|-----------|-----------|----|------|
| K- 07 25 00 67 | G 1/4 | 0.5 - 10 bar | 1500 | 47,8 | 192,1 mm | 67,0 | 125,1 | 6 | 1 |
| K- 07 25 00 71 | G 3/8 | 0.5 - 10 bar | 1500 | 47,8 | 192,1 mm | 67,0 | 125,1 | 10 | 1 |
| K- 07 25 00 75 | G 1/2 | 0.5 - 10 bar | 3500 | 68,8 | 246,3 mm | 99,0 | 147,3 | 15 | 2 |
| K- 07 25 00 79 | G 3/4 | 0.5 - 10 bar | 3500 | 68,8 | 246,3 mm | 99,0 | 147,3 | 20 | 2 |
| K- 07 25 00 83 | G 1 | 0.5 - 10 bar | 12000 | 100,0 | 381,8 mm | 128,0 | 253,8 | 25 | 3 |

备件

| | |
|---------------------------------|---------------------------|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTAFELMUTTER | Nut |
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-METALLBEHÄLTER OELER MULTIFIX | Metal tank oiler |
| K-PC-BEHÄLTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-SCHUTZKORB G | Protective cage |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-FILTERELEMENT | Filter element |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |