


K-SCHALTVENTILE 3/2 MULTIFIX

On-off valves (3/2-way valves)

HANSA FLEX

属性

| | |
|----------|--|
| 入口压力 | Min. 2 bar, max. 10 bar |
| 介质温度 | max. 60 °C |
| 环境温度 | Max. 60 °C |
| 电接口 | Device plug PG 9, type B, EN 175301-803 |
| 保护等级 | IP 65 (P 54) acc. to DIN 40050 |
| 相对接通持续时间 | 100 % |
| 排气接口 | Silencer G 1/4 |
| 密封材料 | NBR |
| 壳体 | Die-cast zinc |
| 流量值测量 | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

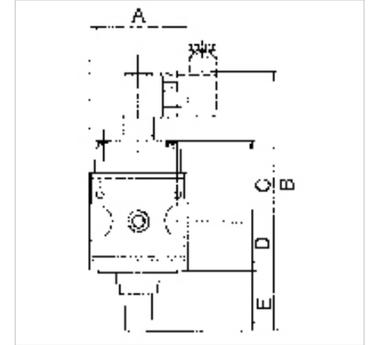

提示

其它数据应客户要求提供。

描述

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is relieved at the same time.

订购指南

On-off valves are also available in a pneumatically operated version. Please ask for more information.

货品

| 名称 | 螺纹 | 流量 (L/min) | 电磁线圈 | A (mm) | B | C (mm) | D (mm) | E (mm) | 结构尺寸 |
|----------------|-------|---------------|--------------------------|-----------|----------|-----------|-----------|-----------|------|
| K- 07 25 11 65 | G 1/4 | 900 | 24 V AC, 50 Hz | 47,8 | 138,7 mm | 43,7 | 26,0 | 17,5 | 1 |
| K- 07 25 11 66 | G 1/4 | 900 | 230 V AC, 50 Hz | 47,8 | 138,7 mm | 43,7 | 26,0 | 17,5 | 1 |
| K- 07 25 11 67 | G 1/4 | 900 | 110 V AC, 50 Hz | 47,8 | 138,7 mm | 43,7 | 26,0 | 17,5 | 1 |
| K- 07 25 11 68 | G 1/4 | 900 | 24 V DC | 47,8 | 138,7 mm | 43,7 | 26,0 | 17,5 | 1 |
| K- 07 25 11 69 | G 1/2 | 4000 | 24 V AC, 50 Hz / 12 V DC | 68,8 | 185,0 mm | 56,2 | 33,5 | 44,1 | 2 |
| K- 07 25 11 70 | G 1/2 | 4000 | 230 V AC, 50 Hz | 68,8 | 185,0 mm | 56,2 | 33,5 | 44,1 | 2 |
| K- 07 25 11 71 | G 1/2 | 4000 | 110 V AC, 50 Hz | 68,8 | 185,0 mm | 56,2 | 33,5 | 44,1 | 2 |
| K- 07 25 11 72 | G 1/2 | 4000 | 24 V DC | 68,8 | 185,0 mm | 56,2 | 33,5 | 44,1 | 2 |

附件

K-SCHALLDAE SINTERBR GE MS1 Silencers, sintered bronze, with brass hexagon nut and brass thread

备件

| | |
|--------------------------------|-----------------|
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-GERAETESTECKER | Coupling socket |
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-MAGNETSPULE MULTIFIX | Solenoid |
| K-WV 3/2 VORSTEU HAND MULTIFIX | 3/2-way valve |