

# K-ANFAV MULTIFIX MINI

Start-up valves

## 属性

| | |
|---|---|
| **入口压力** | Min. 2.5 bar, max. 16 bar |
| **介质温度** | max. 60 °C |
| **环境温度** | Max. 60 °C |
| **流量** | 1600 l/min |
| **密封材料** | NBR |
| **壳体** | Die-cast zinc |
| **流量值测量** | At P1 = 6 bar and pressure drop Δp = 1 bar |

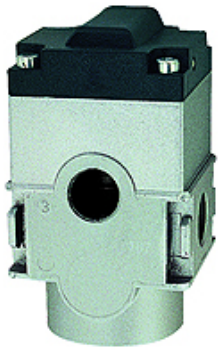

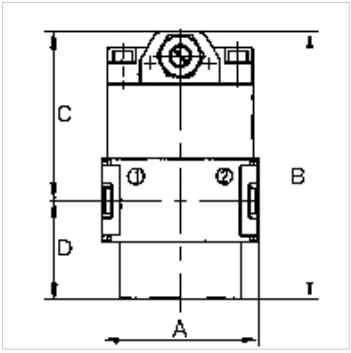


## 提示

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
其它数据应客户要求提供。

## 描述

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. The full cross-section of the regulator is opened at 50% of the input pressure. With adjustable restrictor!

## 货品

| 名称 | 螺纹 | A (mm) | B | C (mm) | D (mm) |
|---|---|---|---|---|---|
| **K- 07 25 11 53** | G 1/4 | 45,0 | 77,5 mm | 48,5 | 29,0 |

## 附件

| | |
|---|---|
| **K-HALTERBAUSATZ** | Holder |

## 备件

| | |
|---|---|
| **K-KOPPELPAKET MEHR** | Coupling packet |

*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*