


K-NEBELOELER PC-BEHÄLTER MULTIFIX MIN

Oil-mist lubricators with polycarbonate bowl

HANSA FLEX

属性

| | |
|-------|--|
| 入口压力 | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| 介质温度 | max. 60 °C |
| 环境温度 | Max. 60 °C |
| 流量 | 1000 l/min |
| 密封材料 | NBR |
| 壳体 | Die-cast zinc |
| 泄水头 | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| 油种类 | CL 32 acc. to DIN 51517 - ISO VG 32 |
| 流量值测量 | At P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

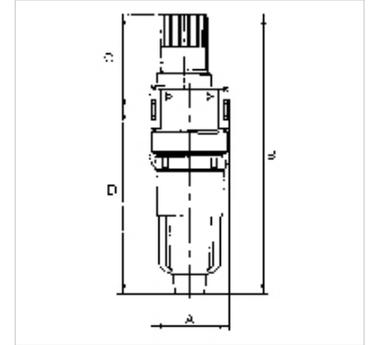

提示

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
其它数据应客户要求提供。

描述

Micro-lubricators, oil can be filled under pressure.

货品

| 名称 | 螺纹 | A (mm) | B | C (mm) | D (mm) | DN | 结构尺寸 |
|----------------|-------|-----------|----------|-----------|-----------|----|------|
| K- 07 25 00 87 | G 1/8 | 40,0 | 145,1 mm | 49,6 | 95,5 | 5 | 0 |
| K- 07 25 00 89 | G 1/4 | 40,0 | 145,1 mm | 49,6 | 95,5 | 5 | 0 |

备件

| | |
|-----------------------------|--|
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-ERSATZBEHÄLTER MULTI MINI | Spare tank »multifix-mini« & »standard-mini« |
| K-TROPFAUFSATZ POLYCARBO 1 | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL | Drip attachment metal |