


# K-NEBELOELER PC-BEHAEALTER STANDARD

Oil-mist lubricators with polycarbonate bowl

**HANSA FLEX**

## 属性

|        |                                                                         |
|--------|-------------------------------------------------------------------------|
| 入口压力   | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl) |
| 介质温度   | max. 60 °C                                                              |
| 环境温度   | Max. 60 °C                                                              |
| 密封材料   | NBR                                                                     |
| 壳体     | Die-cast zinc, painted silver                                           |
| 泄水头    | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)                    |
| 油种类    | CL 32 acc. to DIN 51517 - ISO VG 32                                     |
| 流量值测量  | At P2 = 6 bar and pressure drop $\Delta p = 1$ bar                      |
| 更多注明信息 | User manual on request                                                  |

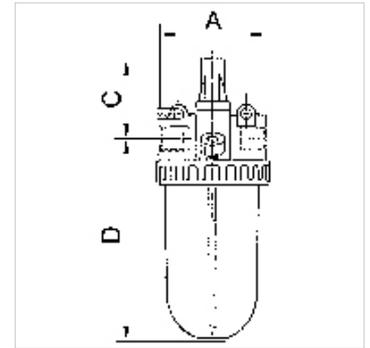

## 描述

Proportional lubricators, oil can be filled under pressure.

## 货品

| 名称             | 螺纹      | 流量<br>(L/min) | A<br>(mm) | C<br>(mm) | D<br>(mm) | DN |
|----------------|---------|---------------|-----------|-----------|-----------|----|
| K- 07 25 08 87 | G 1/4   | 1200          | 50,0      | 51,0      | 118,0     | 6  |
| K- 07 25 08 90 | G 3/8   | 1200          | 50,0      | 51,0      | 118,0     | 6  |
| K- 07 25 08 93 | G 3/8   | 2400          | 70,0      | 51,0      | 129,5     | 10 |
| K- 07 25 08 96 | G 1/2   | 4000          | 79,0      | 55,0      | 157,0     | 15 |
| K- 07 25 08 99 | G 3/4   | 9000          | 102,0     | 58,0      | 160,0     | 20 |
| K- 07 25 09 02 | G 1     | 9000          | 90,0      | 58,0      | 160,0     | 25 |
| K- 07 25 09 05 | G 1 1/4 | 9000          | 137,0     | 70,0      | 232,0     | 40 |
| K- 07 25 09 08 | G 1 1/2 | 9000          | 125,0     | 70,0      | 232,0     | 45 |

## 备件

|                            |                                                           |
|----------------------------|-----------------------------------------------------------|
| K-HALTERBAUSATZ STANDARD   | Holder                                                    |
| K-TROPFAUFSATZ POLYCARBO   | Drip attachment polycarbonate                             |
| K-SCHUTZKORB G             | Protective cage                                           |
| K-XV AGM MS NI             | Double nipples, parallel male thread, nickel-plated brass |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples                                            |
| K-RD NIPPEL MS NI          | Reducing nipples - nickel-plated brass                    |
| K-TROPFAUFSATZ METALL      | Drip attachment metal                                     |