


# K-DRG VARIOBLOC

Pressure regulators

**HANSA FLEX**

## 属性

入口压力	Max. 25 bar
介质温度	max. 50 °C
环境温度	Max. 50 °C
密封材料	NBR
弹簧罩	POM
壳体	Die-cast zinc
膜片	NBR
流量值测量	At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

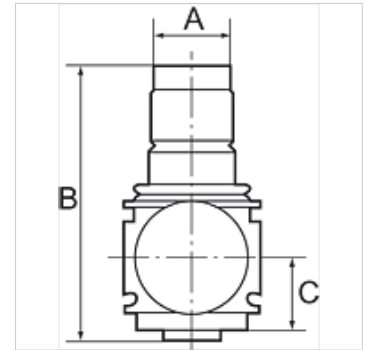

## 提示

其它数据应客户要求提供。

## 描述

Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design. The pressure setting can be locked by pushing the knob down. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## 订购指南

Pressure regulators are also available in lockable version. Please ask for more information.

## 货品

名称	螺纹	调节范围	流量 (L/min)	A (mm)	B	C (mm)
K-07 25 04 18	G 1/4	0.5 - 6 bar	2000	48,0	98,0 mm	26,0
K-07 25 04 19	G 1/4	0.5 - 10 bar	2000	48,0	98,0 mm	26,0
K-07 25 04 20	G 1/4	0.5 - 16 bar	2000	48,0	98,0 mm	26,0
K-07 25 04 21	G 3/8	0.5 - 6 bar	3200	48,0	98,0 mm	26,0
K-07 25 04 22	G 3/8	0.5 - 10 bar	3200	48,0	98,0 mm	26,0
K-07 25 04 23	G 3/8	0.5 - 16 bar	3200	48,0	98,0 mm	26,0
K-07 25 04 24	G 1/2	0.5 - 6 bar	7000	70,0	134,0 mm	32,5
K-07 25 04 25	G 1/2	0.5 - 10 bar	7000	70,0	134,0 mm	32,5
K-07 25 04 26	G 1/2	0.5 - 16 bar	7000	70,0	134,0 mm	32,5
K-07 25 04 27	G 3/4	0.5 - 6 bar	8000	70,0	134,0 mm	32,5
K-07 25 04 28	G 3/4	0.5 - 10 bar	8000	70,0	134,0 mm	32,5
K-07 25 04 29	G 3/4	0.5 - 16 bar	8000	70,0	134,0 mm	32,5
K-07 25 04 30	G 1	0.5 - 6 bar	8000	124,0	134,0 mm	32,5
K-07 25 04 31	G 1	0.5 - 10 bar	8000	124,0	134,0 mm	32,5
K-07 25 04 32	G 1	0.5 - 16 bar	8000	124,0	134,0 mm	32,5

## 备件

K-VERSCHLEI-SATZ VARIOBLOC Set of wearing parts