


# K-DRG DRVS VARIOBLOC

Pressure regulators with pressure supply at both ends



|       |   |
|-------|---|
| 属性    |   |
| 入口压力  | Max. 25 bar   |
| 介质温度  | max. 50 °C  |
| 环境温度  | Max. 50 °C  |
| 密封材料  | NBR   |
| 弹簧罩   | POM-brass   |
| 壳体    | Die-cast zinc   |
| 流量值测量 | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

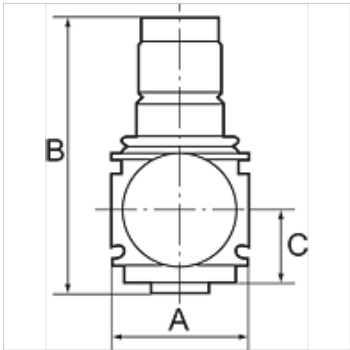

提示

其它数据应客户要求提供。

描述

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down.  
<br>By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

订购指南

Pressure regulators are also available in lockable version. Please ask for more information.

| 货品             |       |              |               |           |         |           |
|----------------|-------|--------------|---------------|-----------|---------|-----------|
| 名称             | 螺纹    | 调节范围         | 流量<br>(L/min) | A<br>(mm) | B       | C<br>(mm) |
| K- 07 25 04 33 | G 1/4 | 0.5 - 6 bar  | 1800          | 48,0      | 98,0 mm | 26,0      |
| K- 07 25 04 34 | G 1/4 | 0.5 - 10 bar | 1800          | 48,0      | 98,0 mm | 26,0      |
| K- 07 25 04 35 | G 1/4 | 0.5 - 16 bar | 1800          | 48,0      | 98,0 mm | 26,0      |
| K- 07 25 04 36 | G 3/8 | 0.5 - 6 bar  | 1800          | 48,0      | 98,0 mm | 26,0      |
| K- 07 25 04 37 | G 3/8 | 0.5 - 10 bar | 1800          | 48,0      | 98,0 mm | 26,0      |
| K- 07 25 04 38 | G 3/8 | 0.5 - 16 bar | 1800          | 48,0      | 98,0 mm | 26,0      |

|                            |                      |
|----------------------------|----------------------|
| 备件                         |                      |
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |