


K-WTEH 2-TLG PC-BEHAEL VARIOBLOC

Service units, 2-piece with polycarbonate bowl

HANSA FLEX

属性

| | |
|-------------|---|
| 入口压力 | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| 介质温度 | max. 50 °C |
| 环境温度 | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| 过滤器元件中的气孔宽度 | 40 µm |
| 密封材料 | NBR |
| 弹簧罩 | POM |
| 壳体 | Die-cast zinc |
| 膜片 | NBR |
| 泄水头 | PA |
| Drain valve | Manual |
| 流量值测量 | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

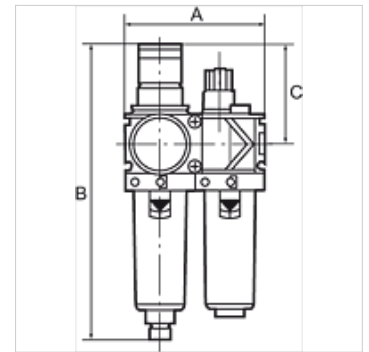

提示

其它数据应客户要求提供。

描述

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

订购指南

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

附加信息

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

货品

| 名称 | 螺纹 | 调节范围 | 流量 (L/min) | A (mm) | B | C (mm) |
|----------------|-------|--------------|---------------|-----------|----------|-----------|
| K- 07 25 13 85 | G 1/4 | 0.5 - 10 bar | 1500 | 96,0 | 203,0 mm | 68,0 |
| K- 07 25 13 87 | G 3/8 | 0.5 - 10 bar | 1800 | 96,0 | 203,0 mm | 68,0 |
| K- 07 25 13 89 | G 1/2 | 0.5 - 10 bar | 3400 | 140,0 | 273,0 mm | 98,0 |
| K- 07 25 13 91 | G 3/4 | 0.5 - 10 bar | 5000 | 140,0 | 273,0 mm | 98,0 |
| K- 07 25 13 93 | G 1 | 0.5 - 10 bar | 5000 | 194,0 | 273,0 mm | 98,0 |

备件

| | |
|----------------------------------|--|
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |
| K-FILTERELEMENT VARIOBLOC | Filter element |
| K-TROPFAUFSATZ VARIOBLOC | Drip attachment |
| K-ERSATZBEHAELTER VARIOBLOC POLY | Spare tank Polycarbonat |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |
| K-TROPFAUFSATZ METALL | Drip attachment metal |