


K-FI RUECKSPUEL M DRUCKREGLER

Back-flushing filters with pressure regulator

HANSA FLEX

属性

入口压力	Max. 16 bar
环境温度	+5 °C to +40 °C
水温度 min.	5 °C
水温度 max.	30 °C
过滤元件中的气孔宽度	90 µm (first filter element), 110 µm (second filter element)
壳体	Brass
滤杯	Impact-resistant plastic
流通性能	at $\Delta p = 0.2$ bar
更多注明信息	DVGW Zertifikat

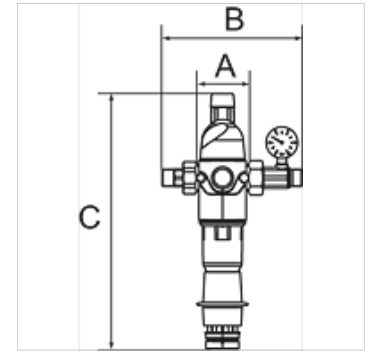

提示

其它数据应客户要求提供。

描述

Combined station for filtering and regulating the pressure of drinking and domestic water in addition to well, process and cooling water for once-through cooling systems, consisting of a diaphragm pressure regulator with a pressure-reduced single-seated valve and a back-flushing filter. The filter candle must be cleaned manually at regular intervals by back-flushing (flushing out dirt particles). Integrated back-flushing element with suction elements, back-flushing lever, wing lever for back-flushing element, hose connection for flushing water.

货品

名称	螺纹	DN	调节范围	流量 kvs 值 (m ³ /h)	A (mm)	B	C (mm)
K- 07 25 10 11	R 3/4	20	2 - 6 bar	3,0	79,7	213,0 mm	392,8
K- 07 25 10 12	R 1	25	2 - 6 bar	3,5	79,7	213,0 mm	392,8
K- 07 25 10 13	R 1 1/4	32	2 - 6 bar	4,0	79,7	213,0 mm	392,8

备件

K-FILTEREINSATZ	Filter insert
K-KUNSTSTOFFBEHAELTER	Plastic tank