
K-DRV STECK V RAENDEL

Unidirectional flow control valves, incoming air restriction (»V«), plug-in connector

属性

工作压力	最大 10 巴
温度范围	0 °C to +70 °C
空心螺钉,摆臂,调节螺钉	Nickel-plated brass
内部部件	Brass with a bare metal surface
O 形圈凸缘密封件	NBR
密封(防丢失)	Polyamide (glass fibre-reinforced)



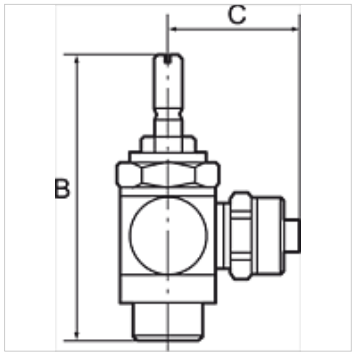

提示

其它数据应客户要求提供。

描述

For fine regulation of a cylinder piston speed in the forward and return motion and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder. Compact type of construction, also ideal where space is restricted. On the version with a knurled screw, the set volumetric flow rate can be locked with the hexagon nut to obtain a fixed setting.

货品

名称	C (mm)	用于软管	螺纹	SW	B (mm)
K- 07 15 05 21	18,6	4 mm	M 5	8 mm	38,9
K- 07 15 05 22	21,7	6 mm	M 5	8 mm	38,9
K- 07 15 05 26	20,6	4 mm	G 1/8	14 mm	42,4
K- 07 15 05 27	22,7	6 mm	G 1/8	14 mm	42,4
K- 07 15 04 73	23,7	8 mm	G 1/8	14 mm	42,4
K- 07 15 05 24	24,2	6 mm	G 1/4	17 mm	51,4
K- 07 15 05 25	24,7	8 mm	G 1/4	17 mm	51,4
K- 07 15 05 23	26,8	10 mm	G 1/4	17 mm	51,4

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。