
K-DRV ABLD STECK C SCHLITZ

Unidirectional flow control valves, outgoing air restriction (»C«), plug-in connector

属性

工作压力	最大 10 巴
温度范围	0 °C to +70 °C
空心螺钉,摆臂,调节螺钉	Nickel-plated brass
内部部件	Brass with a bare metal surface
O 形圈凸缘密封件	NBR
密封(防丢失)	Polyamide (glass fibre-reinforced)



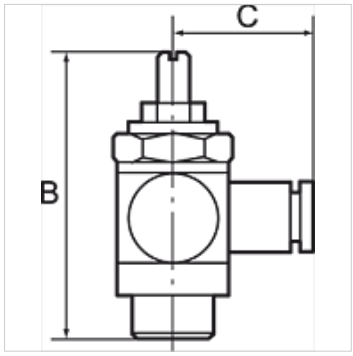

提示

其它数据应客户要求提供。

描述

For fine regulation of a cylinder piston speed and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder. Compact type of construction, also ideal where space is restricted.

货品

名称	C (mm)	用于软管	螺纹	SW	B (mm)
K- 07 15 04 74	18,6	4 mm	M 5	8 mm	24,5
K- 07 15 04 75	21,7	6 mm	M 5	8 mm	24,5
K- 07 15 04 79	20,6	4 mm	G 1/8	14 mm	32,0
K- 07 15 04 80	22,7	6 mm	G 1/8	14 mm	32,0
K- 07 15 04 81	23,7	8 mm	G 1/8	14 mm	32,0
K- 07 15 04 77	24,2	6 mm	G 1/4	17 mm	40,0
K- 07 15 04 78	24,7	8 mm	G 1/4	17 mm	40,0
K- 07 15 04 76	26,8	10 mm	G 1/4	17 mm	40,0
K- 07 15 04 82	28,8	10 mm	G 3/8	20 mm	50,0

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。