
# K-DRV SCHNVERSCHR V SCHLITZ

Unidirectional flow control valves, incoming air restriction (»V«), quick-lock screw fitting

## 属性

| | |
|---|---|
| **工作压力** | 最大 10 巴 |
| **温度范围** | 0 °C to +70 °C |
| **空心螺钉,摆臂,调节螺钉** | Nickel-plated brass |
| **内部部件** | Brass with a bare metal surface |
| **O 形圈凸缘密封件** | NBR |
| **密封(防丢失)** | Polyamide (glass fibre-reinforced) |



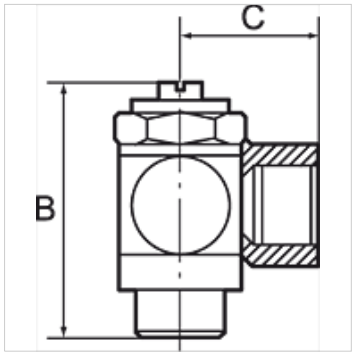


## 提示

其它数据应客户要求提供。

## 描述

For fine regulation of a cylinder piston speed in the forward and return motion and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder to restrict the incoming air. Compact type of construction, also ideal where space is restricted.

## 货品

| 名称 | C (mm) | 用于软管 | 螺纹 | SW | B (mm) |
|---|---|---|---|---|---|
| **K- 07 15 05 63** | 18,0 | 4 mm / 2,5 mm | M 5 | 8 mm | 24,5 |
| **K- 07 15 05 64** | 19,0 | 5 mm / 3 mm | M 5 | 8 mm | 24,5 |
| **K- 07 15 05 65** | 19,0 | 6 mm / 4 mm | M 5 | 8 mm | 24,5 |
| **K- 07 15 05 71** | 23,0 | 5 mm / 3 mm | G 1/8 | 14 mm | 32,0 |
| **K- 07 15 05 72** | 25,0 | 6 mm / 4 mm | G 1/8 | 14 mm | 32,0 |
| **K- 07 15 05 73** | 25,0 | 8 mm / 6 mm | G 1/8 | 14 mm | 32,0 |
| **K- 07 15 05 68** | 26,5 | 6 mm / 4 mm | G 1/4 | 17 mm | 40,0 |
| **K- 07 15 05 69** | 27,5 | 8 mm / 6 mm | G 1/4 | 17 mm | 40,0 |
| **K- 07 15 05 67** | 28,5 | 10 mm / 8 mm | G 1/4 | 17 mm | 40,0 |
| **K- 07 15 05 74** | 30,5 | 10 mm / 8 mm | G 3/8 | 20 mm | 50,0 |

*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*