


# K-DRV STECK V SCHLITZ

Unidirectional flow control valves, incoming air restriction (»V«), plug-in connector

**HANSA FLEX**

## 属性

工作压力	最大 10 巴
温度范围	0 °C to +70 °C
空心螺钉, 摆臂, 调节螺钉	Nickel-plated brass
内部部件	Brass with a bare metal surface
O 形圈凸缘密封件	NBR
密封(防丢失)	Polyamide (glass fibre-reinforced)

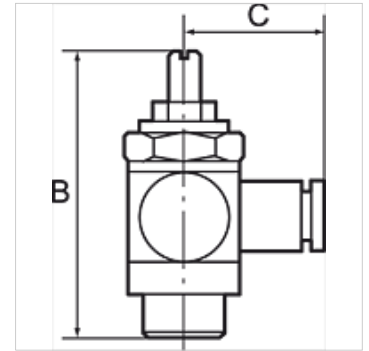

## 提示

其它数据应客户要求提供。

## 描述

For fine regulation of a cylinder piston speed in the forward and return motion and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder to restrict the incoming air. Compact type of construction, also ideal where space is restricted.

## 货品

名称	C (mm)	用于软管	螺纹	SW	B (mm)
K- 07 15 05 28	18,6	4 mm	M 5	8 mm	24,5
K- 07 15 05 29	21,7	6 mm	M 5	8 mm	24,5
K- 07 15 05 33	20,6	4 mm	G 1/8	14 mm	32,0
K- 07 15 05 34	22,7	6 mm	G 1/8	14 mm	32,0
K- 07 15 05 35	23,7	8 mm	G 1/8	14 mm	32,0
K- 07 15 05 31	24,2	6 mm	G 1/4	17 mm	40,0
K- 07 15 05 32	24,7	8 mm	G 1/4	17 mm	40,0
K- 07 15 05 30	26,8	10 mm	G 1/4	17 mm	40,0
K- 07 15 05 36	28,3	10 mm	G 3/8	20 mm	50,0