


# K-DRV STECK V SCHLITZ

Unidirectional flow control valves, incoming air restriction (»V«), plug-in connector

**HANSA FLEX**

## 属性

|                |                                    |
|----------------|------------------------------------|
| 工作压力           | 最大 10 巴                            |
| 温度范围           | 0 °C to +70 °C                     |
| 空心螺钉, 摆臂, 调节螺钉 | Nickel-plated brass                |
| 内部部件           | Brass with a bare metal surface    |
| O 形圈凸缘密封件      | NBR                                |
| 密封(防丢失)        | Polyamide (glass fibre-reinforced) |

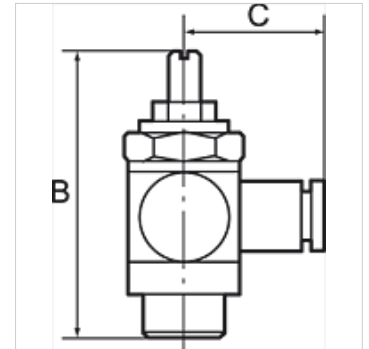

## 提示

其它数据应客户要求提供。

## 描述

For fine regulation of a cylinder piston speed in the forward and return motion and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder to restrict the incoming air. Compact type of construction, also ideal where space is restricted.

## 货品

| 名称             | C<br>(mm) | 用于软管  | 螺纹    | SW    | B<br>(mm) |
|----------------|-----------|-------|-------|-------|-----------|
| K- 07 15 05 28 | 18,6      | 4 mm  | M 5   | 8 mm  | 24,5      |
| K- 07 15 05 29 | 21,7      | 6 mm  | M 5   | 8 mm  | 24,5      |
| K- 07 15 05 33 | 20,6      | 4 mm  | G 1/8 | 14 mm | 32,0      |
| K- 07 15 05 34 | 22,7      | 6 mm  | G 1/8 | 14 mm | 32,0      |
| K- 07 15 05 35 | 23,7      | 8 mm  | G 1/8 | 14 mm | 32,0      |
| K- 07 15 05 31 | 24,2      | 6 mm  | G 1/4 | 17 mm | 40,0      |
| K- 07 15 05 32 | 24,7      | 8 mm  | G 1/4 | 17 mm | 40,0      |
| K- 07 15 05 30 | 26,8      | 10 mm | G 1/4 | 17 mm | 40,0      |
| K- 07 15 05 36 | 28,3      | 10 mm | G 3/8 | 20 mm | 50,0      |